

**FRAME**

**3104J**

**WINDING**

**6**



**MODELS** LL 3114J / LL3124J / LL3134J

REF: F3104JW6-0 SEP 2013

**WINDING DETAILS**

Code	6	Insulation class	H
Phase	3	Leads	12
Pole number	4	Pitch	2/3

**MECHANICAL DETAILS**

Standard protection	IP23
Overspeed	rpm 2250
Air flow 50Hz/60Hz	m <sup>3</sup> /s 0.25/0.3

**EXCITATION DETAILS**

Excitation system	<b>SHUNT</b>	<b>AREP/PMG</b>
AVR model	R250	R438
Sustained short-circuit current	-	300%
Steady state voltage regulation	+/-0,5%	+/-0,5%

**WAVEFORM**

*Line voltage on no load or balanced linear rated load*

Total harmonic content THC	<2%
Telephone influence factor TIF (NEMA)	<50%
Telephone harmonic factor THF (IEC)	<2%

**LINE VOLTAGE**

*No overvoltage tolerance for 440V 50Hz excitation level*

Frequency / speed	50Hz / 1500rpm					60Hz / 1800rpm					
	V	380	400	415	440	380	400	416	440	460	480
Series star	V	380	400	415	440	380	400	416	440	460	480
Series delta	V	220	230	240	220	230	240	220	230	240	240
Parallel star	V		200	208	220	200	208	220	230	240	240

**RATING**

*Power factor 0.8, Altitude <=1000m*

Class	Rating	kVA	150.0	150.0	150.0	130.0	160.0	170.0	177.0	185.0	188.0	188.0
Class H rise BR	125/40	kVA	150.0	150.0	150.0	130.0	160.0	170.0	177.0	185.0	188.0	188.0
		kW	120.0	120.0	120.0	104.0	128.0	136.0	141.6	148.0	150.4	150.4
Class H rise PR	150/40	kVA	159.0	159.0	159.0	137.8	169.6	180.2	187.6	196.1	199.3	199.3
		kW	127.2	127.2	127.2	110.2	135.7	144.2	150.1	156.9	159.4	159.4
Class H rise PR	163/27	kVA	165.0	165.0	165.0	143.0	176.0	187.0	194.5	203.5	207.0	207.0
		kW	132.0	132.0	132.0	114.4	140.8	149.6	155.6	162.8	165.6	165.6
Class F rise BR	105/40	kVA	136.5	136.5	136.5	118.5	145.5	154.5	161.0	168.5	171.0	171.0
		kW	109.2	109.2	109.2	94.8	116.4	123.6	128.8	134.8	136.8	136.8

**EFFICIENCIES**

*Power factor 0.8*

Efficiency	Class	%	92.8	92.8	92.6	92.0	92.8	92.9	93.0	93.2	93.1	93.1
110%	Class H BR	%	92.8	92.8	92.6	92.0	92.8	92.9	93.0	93.2	93.1	93.1
100%	Class H BR	%	93.1	93.1	92.9	92.0	93.1	93.2	93.3	93.5	93.4	93.3
75%	Class H BR	%	93.7	93.6	93.3	91.9	93.8	93.8	93.9	93.8	93.8	93.5
50%	Class H BR	%	93.8	93.4	92.8	90.6	93.9	93.9	93.9	93.6	93.5	93.0
25%	Class H BR	%	91.8	90.7	89.6	85.6	92.1	92.0	91.9	90.9	90.8	89.9

**CHARACTERISTIC PARAMETERS**

*Reactance base class H BR rating*

K <sub>c</sub>	Short-circuit ratio		0.40	0.47	0.58	0.99	0.26	0.28	0.30	0.34	0.38	0.47
X <sub>d</sub>	D-Axis synchronous reactance (unsaturated)	pu	3.38	3.05	2.83	2.18	4.33	4.15	3.99	3.73	3.47	3.19
X' <sub>d</sub>	D-Axis transient reactance (saturated)	pu	0.16	0.15	0.14	0.11	0.21	0.20	0.19	0.18	0.17	0.15
X'' <sub>d</sub>	D-Axis sub-transient reactance (saturated)	pu	0.098	0.088	0.082	0.063	0.125	0.120	0.115	0.108	0.100	0.092
X <sub>q</sub>	Q-Axis synchronous reactance (unsaturated)	pu	2.03	1.83	1.70	1.31	2.60	2.49	2.40	2.24	2.08	1.91
X'' <sub>q</sub>	Q-Axis sub-transient reactance (saturated)	pu	0.193	0.174	0.162	0.125	0.247	0.237	0.228	0.213	0.198	0.182
X <sub>2</sub>	Negative-sequence reactance (saturated)	pu	0.145	0.131	0.122	0.094	0.186	0.178	0.172	0.160	0.149	0.137
X <sub>0</sub>	Zero-sequence reactance (independent)	pu	0.003	0.003	0.003	0.002	0.004	0.004	0.004	0.004	0.003	0.003
T' <sub>d</sub>	D-Axis transient time constant	ms		100						100		
T'' <sub>d</sub>	D-Axis sub-transient time constant	ms		10						10		
T' <sub>do</sub>	D-Axis open-circuit time constant	ms		2079						2079		
T <sub>a</sub>	Armature time constant	ms		15						15		
T <sub>r</sub>	Voltage recovery time	ms		< 500ms						< 500ms		

**EXCITATION VOLTAGE AND CURRENT**

No load excitation voltage	V	7.2	8.5	9.7	12.8	5.0	5.4	5.8	6.6	7.4	8.5
No load excitation current	A	0.56	0.66	0.75	0.99	0.39	0.42	0.45	0.51	0.57	0.66
Class H BR excitation voltage	V	29.6	30.9	32.9	33.9	26.1	27.0	27.8	29.0	29.9	30.9
Class H BR excitation current	A	2.29	2.39	2.54	2.62	2.02	2.09	2.15	2.24	2.31	2.39

**WINDING RESISTANCE**

*At 20° C*

Stator line-to-line (series star)	Ω	0.047				Exciter field			Ω	12.9
Main field	Ω	3.29								

According to: IEC 60034, UTE NFC51.111, VDE 0530, BS 4999/5000, NEMA MG 1-33

Values quoted are typical. In line with our policy of continuous improvement, we reserve the right to change specification without notice.

**FRAME 3104J**

**WINDING 6**




**MODELS LL 3114J / LL3124J / LL3134J**


REF: F3104JW6-0 SEP 2013

**LOCKED ROTOR MOTOR STARTING CURVES** *Power factor 0.6*

**50 Hz SHUNT**

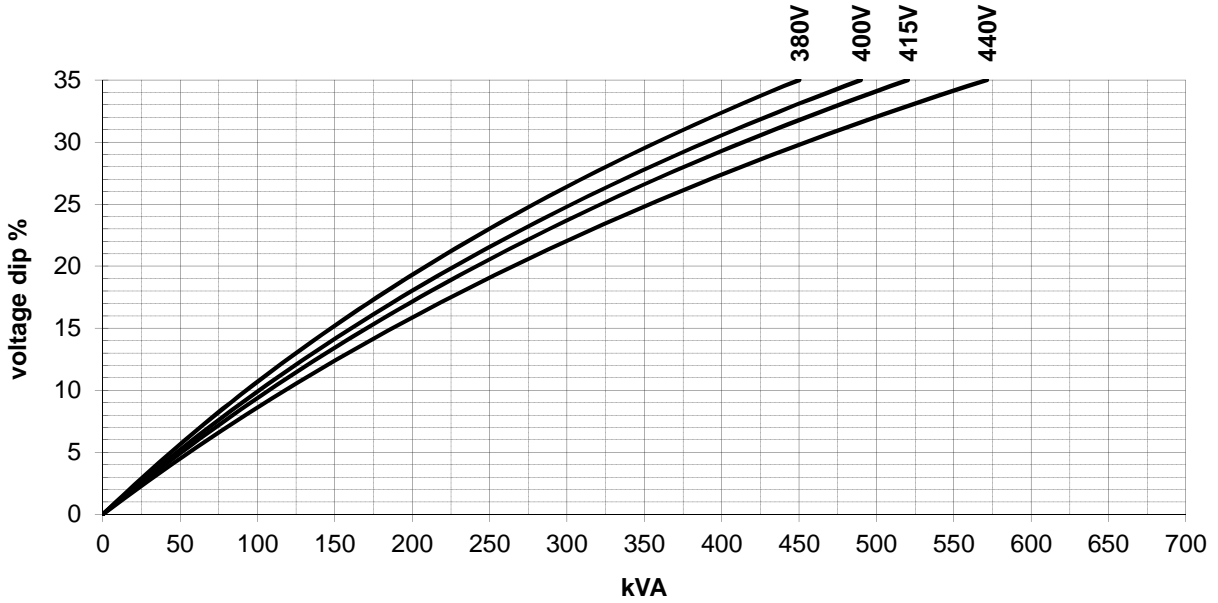

**50 Hz AREP/PMG**

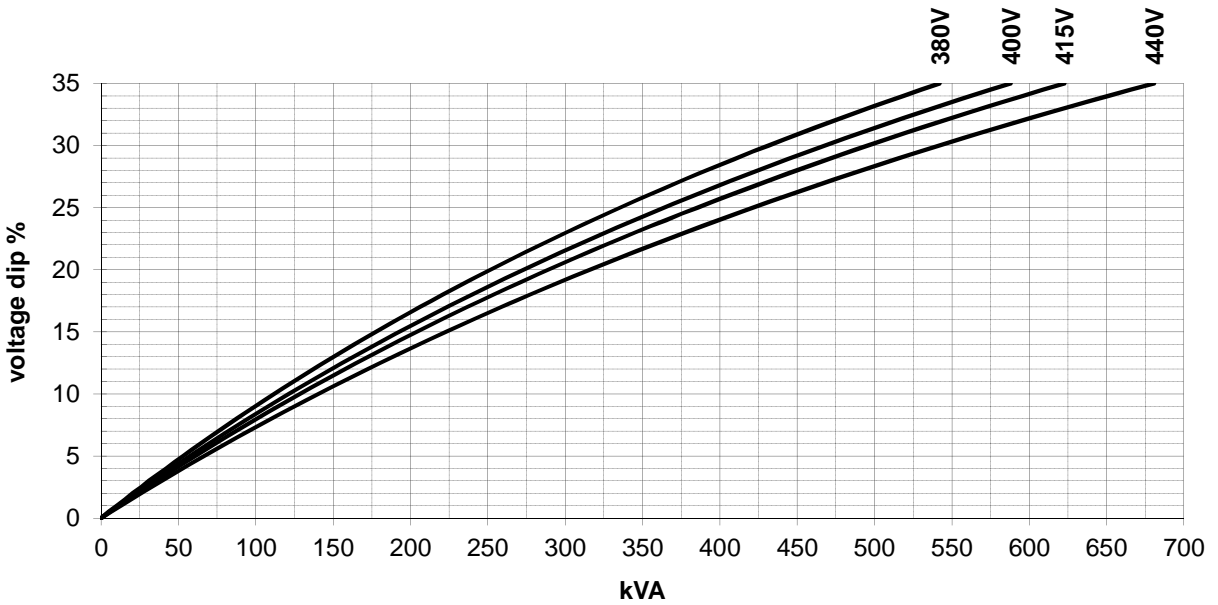

According to: IEC 60034, UTE NFC51.111, VDE 0530, BS 4999/5000, NEMA MG 1-33  
Values quoted are typical. In line with our policy of continuous improvement, we reserve the right to change specification without notice.

FRAME

3104J

WINDING

6



MODELS

LL 3114J / LL3124J / LL3134J


REF: F3104JW6-0

SEP 2013


LOCKED ROTOR MOTOR STARTING CURVES

Power factor 0.6

60 Hz SHUNT

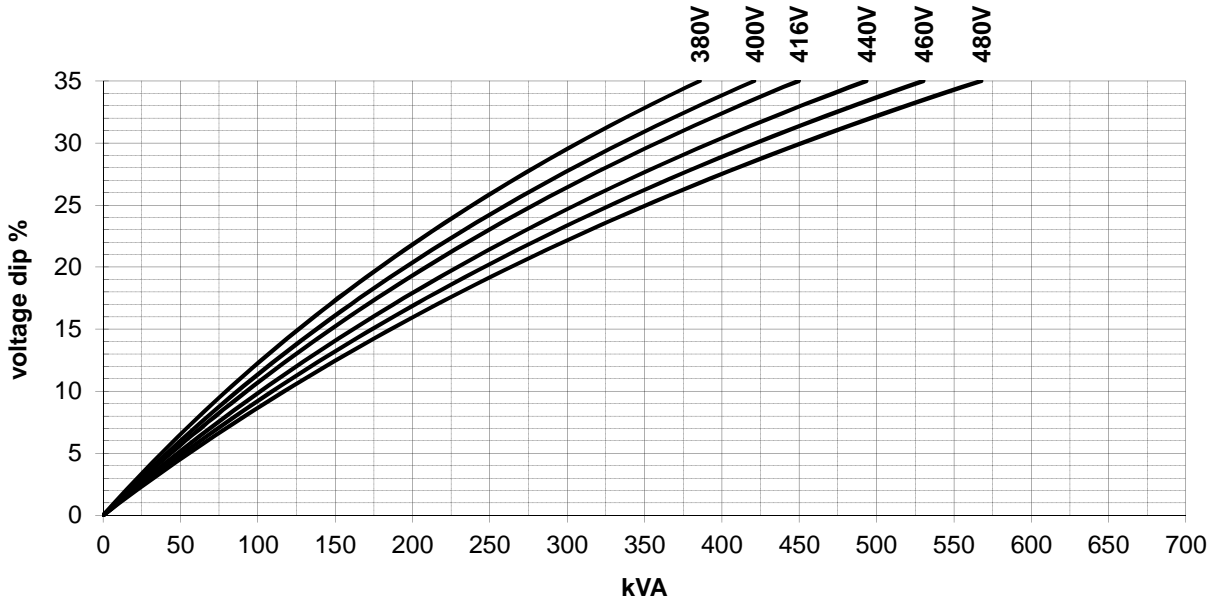

60 Hz AREP/PMG

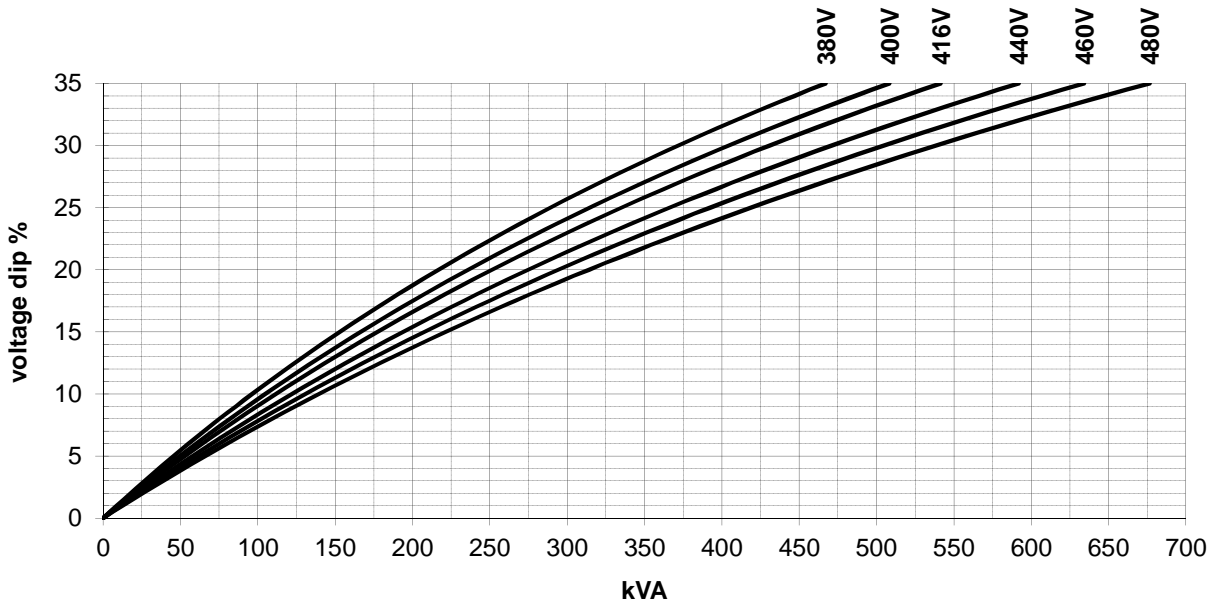

According to: IEC 60034, UTE NFC51.111, VDE 0530, BS 4999/5000, NEMA MG 1-33

Values quoted are typical. In line with our policy of continuous improvement, we reserve the right to change specification without notice.

**FRAME 3104J**

**WINDING 6**



**MODELS LL 3114J / LL3124J / LL3134J**


REF: F3104JW6-0 SEP 2013

**THREE-PHASE SHORT-CIRCUIT DECREMENT CURVES**

*No-load excitation at rated speed*

**400V 50Hz, 480V 60Hz**

*Series star*

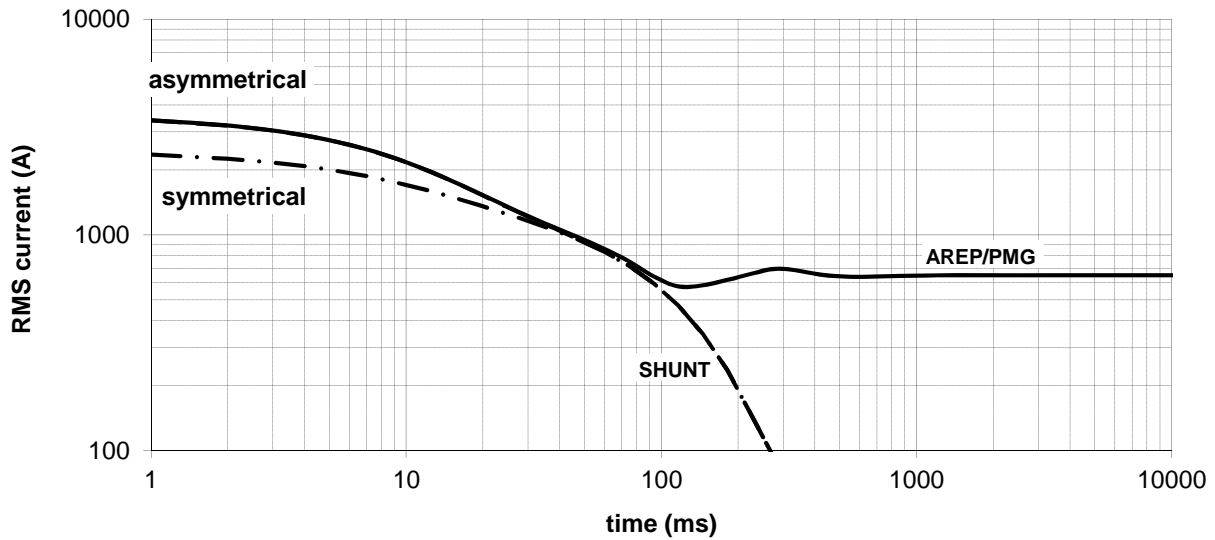

**Multiplication Factors**

<b>50Hz Voltages</b>	<b>380</b>	<b>400</b>	<b>415</b>	<b>440</b>
<b>Multiplication Factor</b>	0.95	1.00	1.04	1.10

*Apply factor up to 2xT'd, remainder of curve unchanged*

<b>60Hz Voltages</b>	<b>380</b>	<b>400</b>	<b>416</b>	<b>440</b>	<b>460</b>	<b>480</b>
<b>Multiplication Factor</b>	0.79	0.83	0.87	0.92	0.96	1.00

*Apply factor up to 2xT'd, remainder of curve unchanged*

<b>Winding Connection</b>	<b>Series Star</b>	<b>Parallel Star</b>	<b>Series Delta</b>
<b>Multiplication Factor</b>	1.00	2.00	1.73

*Apply factor to the complete curve*

According to: IEC 60034, UTE NFC51.111, VDE 0530, BS 4999/5000, NEMA MG 1-33  
 Values quoted are typical. In line with our policy of continuous improvement, we reserve the right to change specification without notice.