



MODELS LL 5014H / LL5024H/ LL5034H

REF: F5004HW6-5 JAN 2013

WINDING DETAILS

Code	6	Insulation class	H
Phase	3	Leads	12
Pole number	4	Pitch	2/3

MECHANICAL DETAILS

Standard protection	IP23
Overspeed	rpm 2250
Air flow 50Hz/60Hz	m ³ /s 0.43/0.51

EXCITATION DETAILS

Excitation system	SHUNT	AREP/PMG
AVR model	R250	R450
Sustained short-circuit current	-	300%
Steady state voltage regulation	+/-0.5%	+/-0.5%

WAVEFORM

Line voltage on no load or balanced linear rated load

Total harmonic content THC	<4%
Telephone influence factor TIF (NEMA)	<50%
Telephone harmonic factor THF (IEC)	<2%

LINE VOLTAGE *No overvoltage tolerance for 440V 50Hz excitation level*

Frequency / speed	50Hz / 1500rpm					60Hz / 1800rpm					
	V	380	400	415	440	380	400	416	440	460	480
Series star	V	380	400	415	440	380	400	416	440	460	480
Series delta	V	220	230	240		220	230	240			
Parallel star	V		200	208	220		200	208	220	230	240

RATING *Power factor 0.8, Altitude <=1000m*

Class	Rating	kVA	250.0	250.0	240.0	215.0	263.0	275.0	285.0	296.0	307.0	312.0
Class H rise BR	125/40	kVA	250.0	250.0	240.0	215.0	263.0	275.0	285.0	296.0	307.0	312.0
		kW	200.0	200.0	192.0	172.0	210.4	220.0	228.0	236.8	245.6	249.6
Class H rise PR	150/40	kVA	265.0	265.0	254.4	227.9	278.8	291.5	302.1	313.8	325.4	330.7
		kW	212.0	212.0	203.5	182.3	223.0	233.2	241.7	251.0	260.3	264.6
Class H rise PR	163/27	kVA	275.0	275.0	266.0	240.0	289.0	303.0	314.0	326.0	338.0	343.0
		kW	220.0	220.0	212.8	192.0	231.2	242.4	251.2	260.8	270.4	274.4
Class F rise BR	105/40	kVA	227.5	227.5	218.4	195.7	239.3	250.3	259.4	269.4	279.4	283.9
		kW	182.0	182.0	174.7	156.5	191.5	200.2	207.5	215.5	223.5	227.1

EFFICIENCIES *Power factor 0.8*

Efficiency	Class	%	92.1	92.2	92.2	91.9	91.6	91.9	92.1	92.3	92.4	92.5
110%	Class H BR	%	92.1	92.2	92.2	91.9	91.6	91.9	92.1	92.3	92.4	92.5
100%	Class H BR	%	92.5	92.6	92.5	92.1	92.0	92.3	92.4	92.6	92.7	92.7
75%	Class H BR	%	93.3	93.2	93.0	92.3	92.9	93.1	93.2	93.3	93.3	93.2
50%	Class H BR	%	93.5	93.3	92.9	91.5	93.2	93.3	93.4	93.4	93.3	93.1
25%	Class H BR	%	91.9	91.2	90.5	87.6	91.5	91.5	91.4	91.3	91.0	90.5

CHARACTERISTIC PARAMETERS *Reactance base class H BR rating*

Parameter	Unit	0.35	0.42	0.49	0.75	0.22	0.24	0.26	0.30	0.33	0.38
K _c Short-circuit ratio		0.35	0.42	0.49	0.75	0.22	0.24	0.26	0.30	0.33	0.38
X _d D-Axis synchronous reactance (unsaturated)	pu	3.61	3.26	2.91	2.32	4.56	4.30	4.12	3.83	3.63	3.39
X' _d D-Axis transient reactance (saturated)	pu	0.17	0.15	0.14	0.11	0.22	0.20	0.20	0.18	0.17	0.16
X'' _d D-Axis sub-transient reactance (saturated)	pu	0.103	0.093	0.083	0.066	0.130	0.123	0.118	0.110	0.104	0.097
X _q Q-Axis synchronous reactance (unsaturated)	pu	2.17	1.95	1.74	1.39	2.73	2.58	2.47	2.30	2.18	2.03
X'' _q Q-Axis sub-transient reactance (saturated)	pu	0.128	0.115	0.103	0.082	0.161	0.152	0.146	0.135	0.128	0.120
X ₂ Negative-sequence reactance (saturated)	pu	0.115	0.104	0.093	0.074	0.145	0.137	0.131	0.122	0.116	0.108
X ₀ Zero-sequence reactance (independent)	pu	0.006	0.005	0.005	0.004	0.007	0.007	0.007	0.006	0.006	0.005
T' _d D-Axis transient time constant	ms		100						100		
T'' _d D-Axis sub-transient time constant	ms		10						10		
T' _{do} D-Axis open-circuit time constant	ms		2105						2105		
T _a Armature time constant	ms		15						15		
T _r Voltage recovery time	ms		< 500						< 500		

EXCITATION VOLTAGE AND CURRENT

Parameter	Unit	8.0	9.2	10.4	13.3	5.7	6.2	6.6	7.4	8.2	9.2
No load excitation voltage	V	8.0	9.2	10.4	13.3	5.7	6.2	6.6	7.4	8.2	9.2
No load excitation current	A	0.91	1.05	1.18	1.51	0.65	0.70	0.75	0.84	0.93	1.04
Class H BR excitation voltage	V	33.0	33.8	35.2	36.1	31.3	31.8	32.4	33.1	34.3	35.5
Class H BR excitation current	A	3.75	3.84	4.00	4.10	3.56	3.61	3.68	3.76	3.90	4.03

WINDING RESISTANCE *At 20° C*

Stator line-to-line (series star)	Ω	0.030				Exciter field		Ω	8.8
Main field	Ω	0.26							

According to: IEC 60034, UTE NFC51.111, VDE 0530, BS 4999/5000, NEMA MG 1-33
 Values quoted are typical. In line with our policy of continuous improvement, we reserve the right to change specification without notice.

FRAME

5004H

WINDING

6



MODELS

LL 5014H / LL5024H/ LL5034H


REF: F5004HW6-5

JAN 2013


LOCKED ROTOR MOTOR STARTING CURVES

Power factor 0.6

50 Hz SHUNT

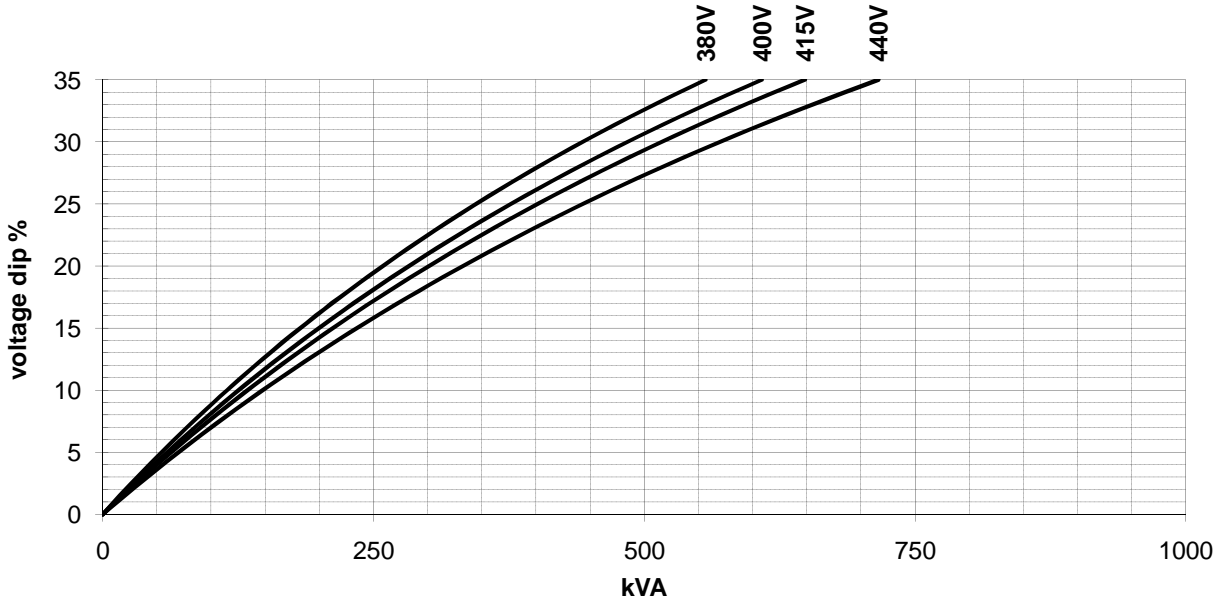

50 Hz AREP/PMG

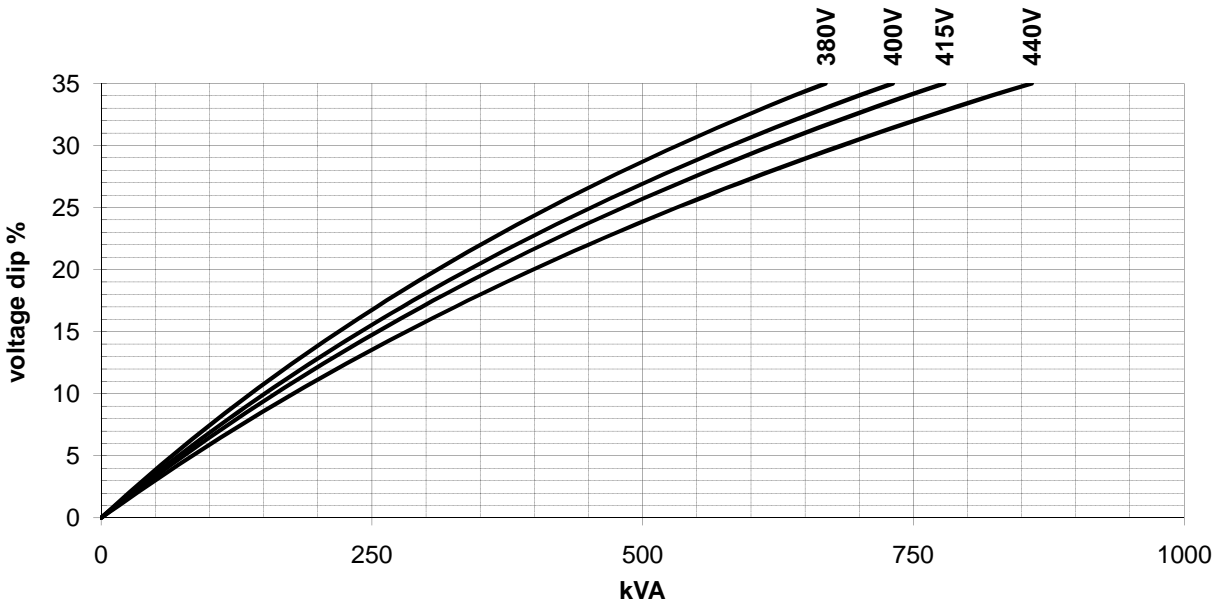

According to: IEC 60034, UTE NFC51.111, VDE 0530, BS 4999/5000, NEMA MG 1-33

Values quoted are typical. In line with our policy of continuous improvement, we reserve the right to change specification without notice.

FRAME

5004H

WINDING

6



MODELS

LL 5014H / LL5024H/ LL5034H


REF: F5004HW6-5

JAN 2013


LOCKED ROTOR MOTOR STARTING CURVES

Power factor 0.6

60 Hz SHUNT

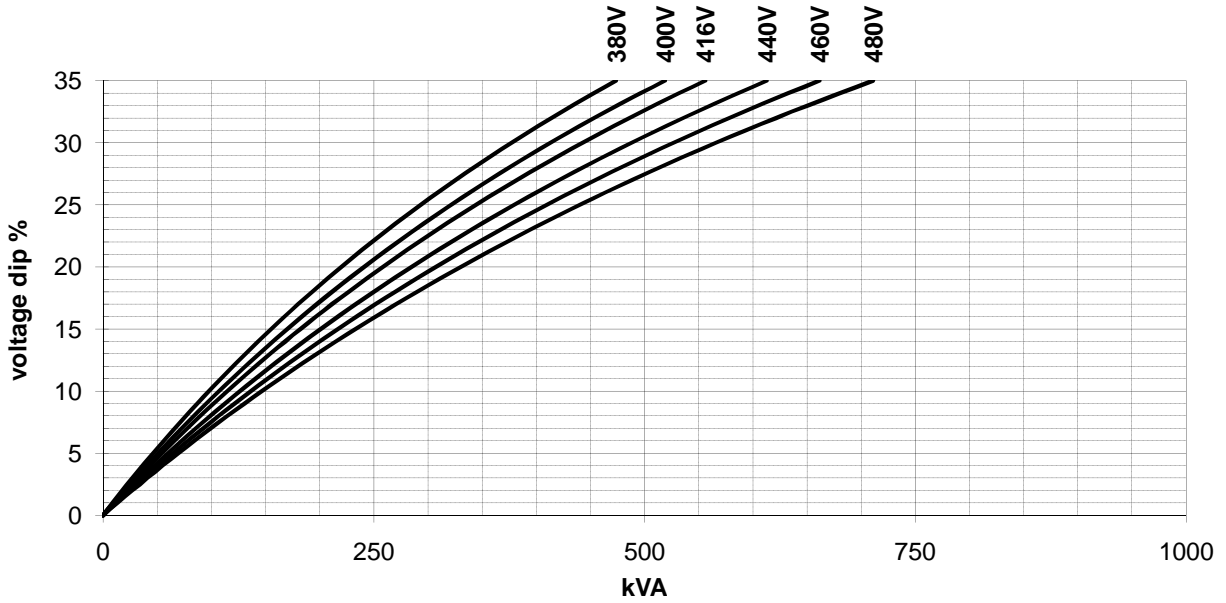

60 Hz AREP/PMG

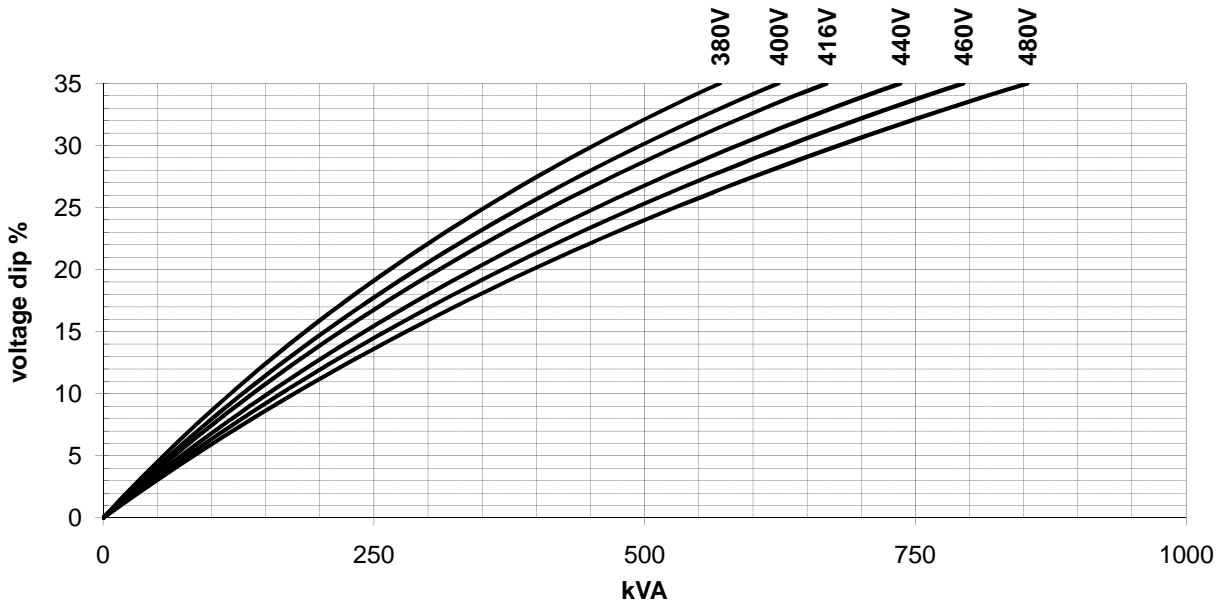


According to: IEC 60034, UTE NFC51.111, VDE 0530, BS 4999/5000, NEMA MG 1-33

Values quoted are typical. In line with our policy of continuous improvement, we reserve the right to change specification without notice.

FRAME**5004H****WINDING****6****MODELS** LL 5014H / LL5024H/ LL5034H

REF: F5004HW6-5 JAN 2013

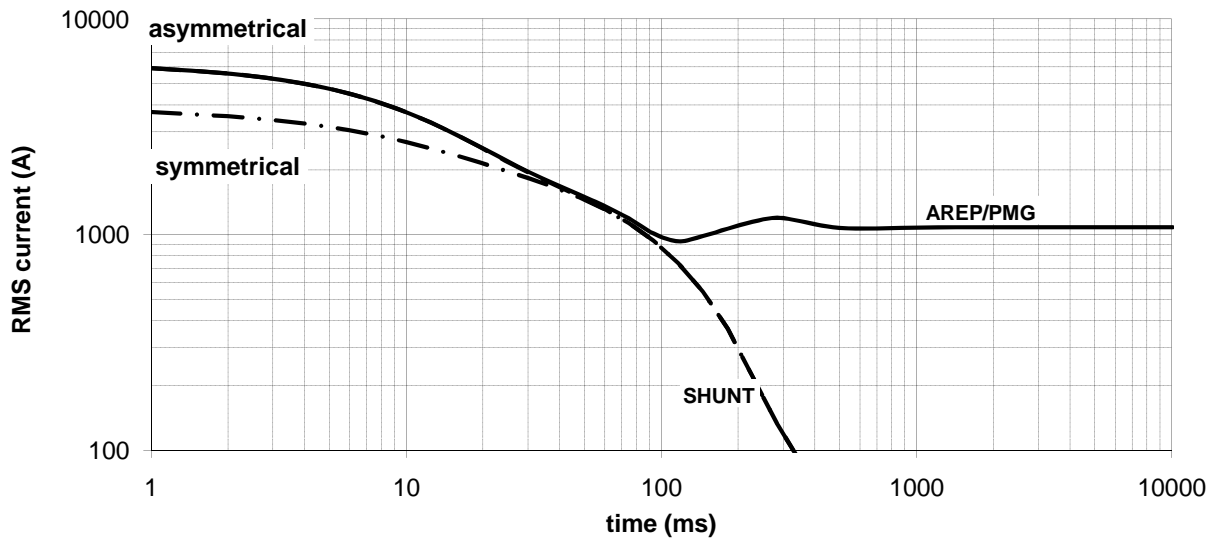THREE-PHASE SHORT-CIRCUIT DECREMENT CURVES*No-load excitation at rated speed***400V 50Hz, 480V 60Hz***Series star***Multiplication Factors****50Hz Voltages**

380	400	415	440	
Multiplication Factor	0.95	1.00	1.04	1.10

*Apply factor up to 2xT'd, remainder of curve unchanged***60Hz Voltages**

380	400	416	440	460	480	
Multiplication Factor	0.79	0.83	0.87	0.92	0.96	1.00

*Apply factor up to 2xT'd, remainder of curve unchanged***Winding Connection**

	Series Star	Parallel Star	Series Delta
Multiplication Factor	1.00	2.00	1.73

Apply factor to the complete curve