

**FRAME**

**1504L**

**WINDING**

**6**



**MODELS**

**LL1514L/LL1524L/LL1534L**

REF: F1504LW6-1

NOVEMBER 2012

**WINDING DETAILS**

Code	6	Insulation class	H
Phase	3	Leads	12
Pole number	4	Pitch	0.667

**MECHANICAL DETAILS**

Standard protection	IP23
Overspeed	rpm 2250
Air flow 50Hz/60Hz	m <sup>3</sup> /s 0.1/0.13

**EXCITATION DETAILS**

Excitation system	<b>SHUNT</b>	<b>AREP/PMG</b>
AVR model	R220	R438
Sustained short-circuit current	-	300
Steady state voltage regulation	+/- 0.5%	+/- 0.5%

**WAVEFORM**

*Line voltage on no load or balanced linear rated load*

Total harmonic content THC	< 2%
Telephone influence factor TIF (NEMA)	< 50
Telephone harmonic factor THF (IEC)	< 2%

**LINE VOLTAGE**

*No overvoltage tolerance for 440V 50Hz excitation level*

Frequency / speed	50Hz / 1500rpm					60Hz / 1800rpm						
	Series star	V	380	400	415	440	380	400	416	440	460	480
Series delta	V	220	230	240	240	240	220	230	240	240	240	240
Parallel star	V		200	208	220	220	200	208	220	230	240	240

**RATING**

*Power factor 0.8, Altitude <=1000m*

Class	Rating	kVA	45.0	45.0	45.0	39.0	46.0	48.5	50.0	53.5	56.5	56.5
Class H rise BR	125/40	kVA	45.0	45.0	45.0	39.0	46.0	48.5	50.0	53.5	56.5	56.5
		kW	36.0	36.0	36.0	31.2	36.8	38.8	40.0	42.8	45.2	45.2
Class H rise PR	150/40	kVA	47.7	47.7	47.7	41.3	48.8	51.4	53.0	56.7	59.9	59.9
		kW	38.2	38.2	38.2	33.0	39.0	41.1	42.4	45.4	47.9	47.9
Class H rise PR	163/27	kVA	50.0	50.0	50.0	42.9	50.6	53.4	55.0	58.9	62.2	62.5
		kW	40.0	40.0	40.0	34.3	40.5	42.7	44.0	47.1	49.7	50.0
Class F rise BR	105/40	kVA	41.0	41.0	41.0	35.5	41.9	44.1	45.5	48.7	51.4	51.4
		kW	32.8	32.8	32.8	28.4	33.5	35.3	36.4	38.9	41.1	41.1

**EFFICIENCIES**

*Power factor 0.8*

Efficiency	Class	%	88.2	88.5	88.6	89.0	88.5	88.8	89.1	89.2	89.3	89.5
110%	Class H BR	%	88.2	88.5	88.6	89.0	88.5	88.8	89.1	89.2	89.3	89.5
100%	Class H BR	%	88.8	89.1	89.1	89.3	89.1	89.4	89.6	89.8	89.8	90.0
75%	Class H BR	%	90.2	90.3	90.2	89.8	90.5	90.7	90.9	90.9	91.0	91.0
50%	Class H BR	%	91.0	90.8	90.5	89.3	91.4	91.5	91.6	91.6	91.5	91.4
25%	Class H BR	%	89.6	88.9	88.2	85.5	90.4	90.3	90.1	90.0	89.8	89.3

**CHARACTERISTIC PARAMETERS**

*Reactance base class H BR rating*

Parameter	Unit	0.39	0.46	0.52	0.78	0.28	0.30	0.32	0.35	0.38	0.43
K <sub>c</sub> Short-circuit ratio		0.39	0.46	0.52	0.78	0.28	0.30	0.32	0.35	0.38	0.43
X <sub>d</sub> D-Axis synchronous reactance (unsaturated)	pu	3.08	2.78	2.58	1.99	3.78	3.60	3.43	3.28	3.17	2.91
X' <sub>d</sub> D-Axis transient reactance (saturated)	pu	0.17	0.15	0.14	0.11	0.20	0.19	0.19	0.18	0.17	0.16
X'' <sub>d</sub> D-Axis sub-transient reactance (saturated)	pu	0.083	0.075	0.070	0.054	0.102	0.097	0.093	0.089	0.086	0.079
X <sub>q</sub> Q-Axis synchronous reactance (unsaturated)	pu	1.54	1.39	1.29	1.00	1.89	1.80	1.71	1.64	1.58	1.45
X'' <sub>q</sub> Q-Axis sub-transient reactance (saturated)	pu	0.117	0.106	0.099	0.076	0.144	0.137	0.131	0.125	0.121	0.111
X <sub>2</sub> Negative-sequence reactance (saturated)	pu	0.100	0.091	0.084	0.065	0.123	0.117	0.112	0.107	0.103	0.095
X <sub>0</sub> Zero-sequence reactance (independent)	pu	0.002	0.002	0.002	0.001	0.003	0.003	0.002	0.002	0.002	0.002
T' <sub>d</sub> D-Axis transient time constant	ms		50					50			
T'' <sub>d</sub> D-Axis sub-transient time constant	ms		5					5			
T' <sub>do</sub> D-Axis open-circuit time constant	ms		925					925			
T <sub>a</sub> Armature time constant	ms		7.5					7.5			
T <sub>r</sub> Voltage recovery time	ms		< 500ms					< 500ms			

**EXCITATION VOLTAGE AND CURRENT**

Parameter	Unit	8.8	9.9	10.9	13.4	6.6	7.1	7.5	8.2	8.9	9.8
No load excitation voltage	V	8.8	9.9	10.9	13.4	6.6	7.1	7.5	8.2	8.9	9.8
No load excitation current	A	0.50	0.56	0.62	0.76	0.37	0.40	0.42	0.46	0.50	0.55
Class H BR excitation voltage	V	31.9	32.4	33.2	32.6	29.3	29.9	30.2	31.4	32.8	33.2
Class H BR excitation current	A	1.81	1.84	1.89	1.85	1.67	1.70	1.71	1.79	1.86	1.88

**WINDING RESISTANCE**

*At 20°C*

Parameter	Ω	0.274	Exciter field	Ω	17.6
Stator line-to-line (series star)	Ω	0.274	Exciter field	Ω	17.6
Main field	Ω	0.84			

According to: IEC 60034, UTE NFC51.111, VDE 0530, BS 4999/5000, NEMA MG 1-33

Values quoted are typical. In line with our policy of continuous improvement, we reserve the right to change specification without notice.

**FRAME**

**1504L**

**WINDING**

**6**



**MODELS**

**LL1514L/LL1524L/LL1534L**


REF: F1504LW6-1

NOVEMBER 2012


**LOCKED ROTOR MOTOR STARTING CURVES**

*Power factor 0.6*

**50 Hz SHUNT**

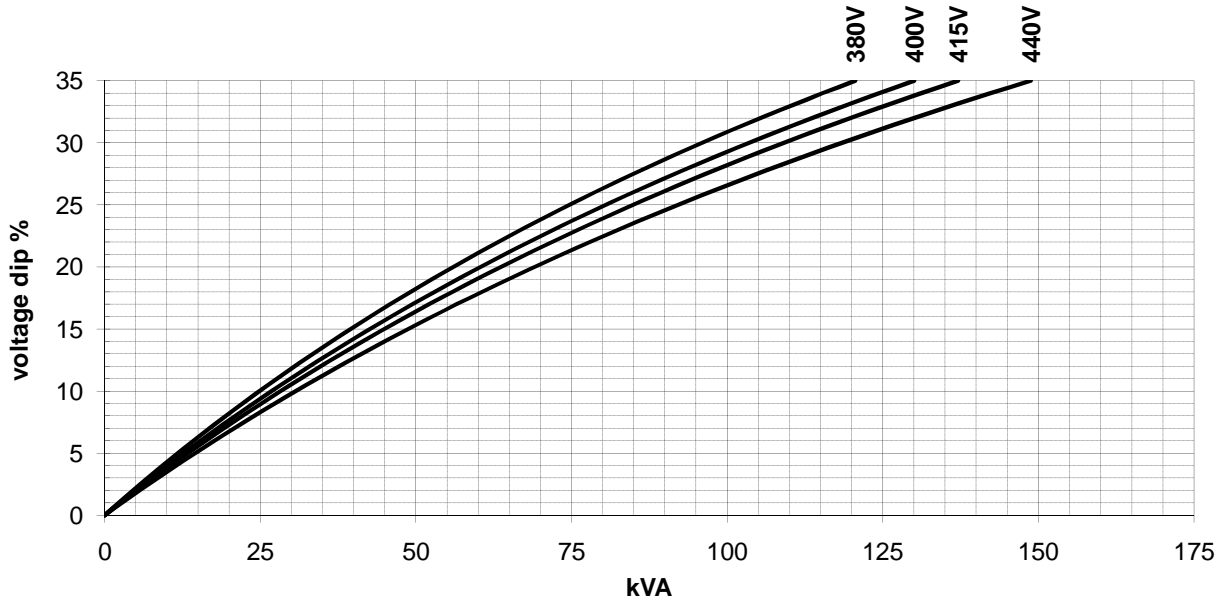

**50 Hz AREP/PMG**

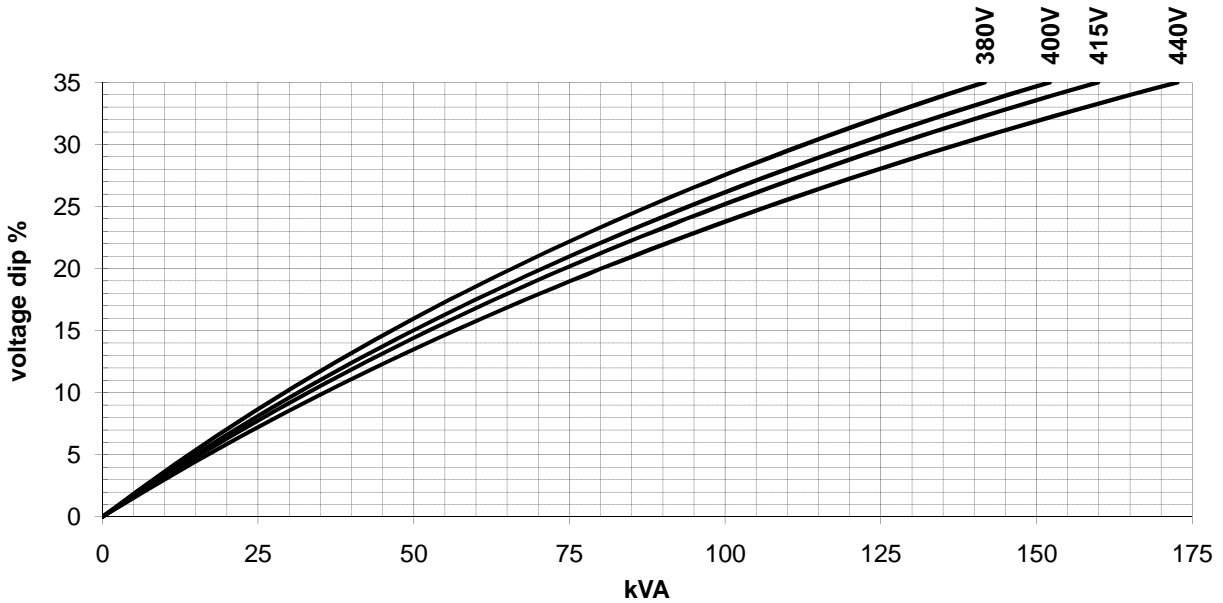

According to: IEC 60034, UTE NFC51.111, VDE 0530, BS 4999/5000, NEMA MG 1-33

Values quoted are typical. In line with our policy of continuous improvement, we reserve the right to change specification without notice.

**FRAME 1504L**

**WINDING 6**




**MODELS LL1514L/LL1524L/LL1534L**

REF: F1504LW6-1 NOVEMBER 2012


**LOCKED ROTOR MOTOR STARTING CURVES**

*Power factor 0.6*

**60 Hz SHUNT**

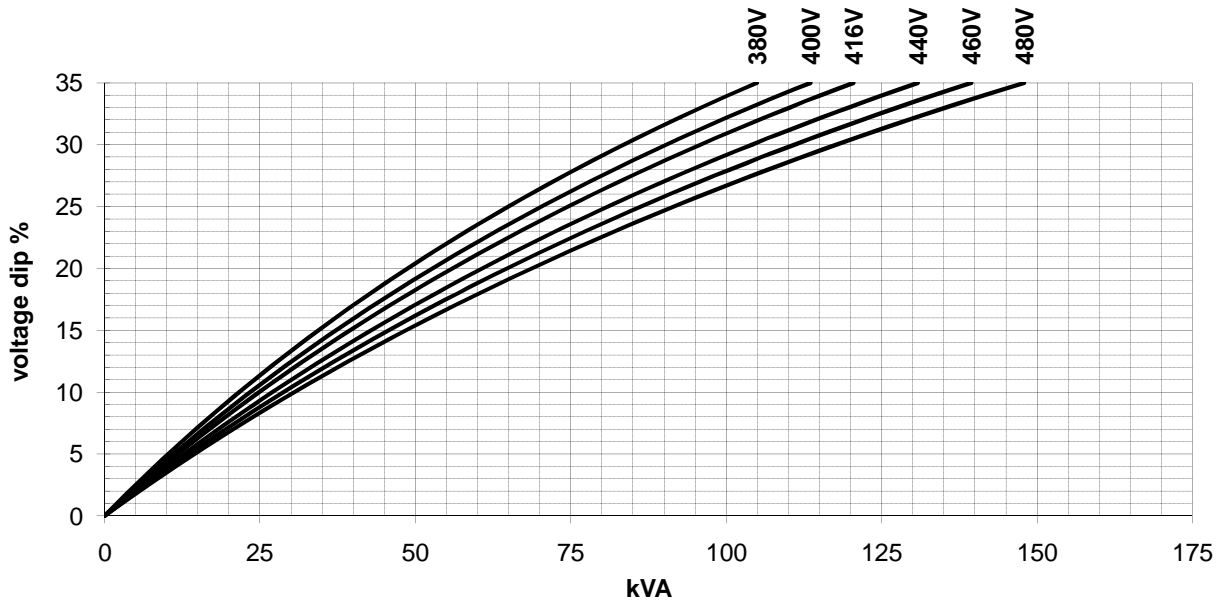


**60 Hz AREP/PMG**

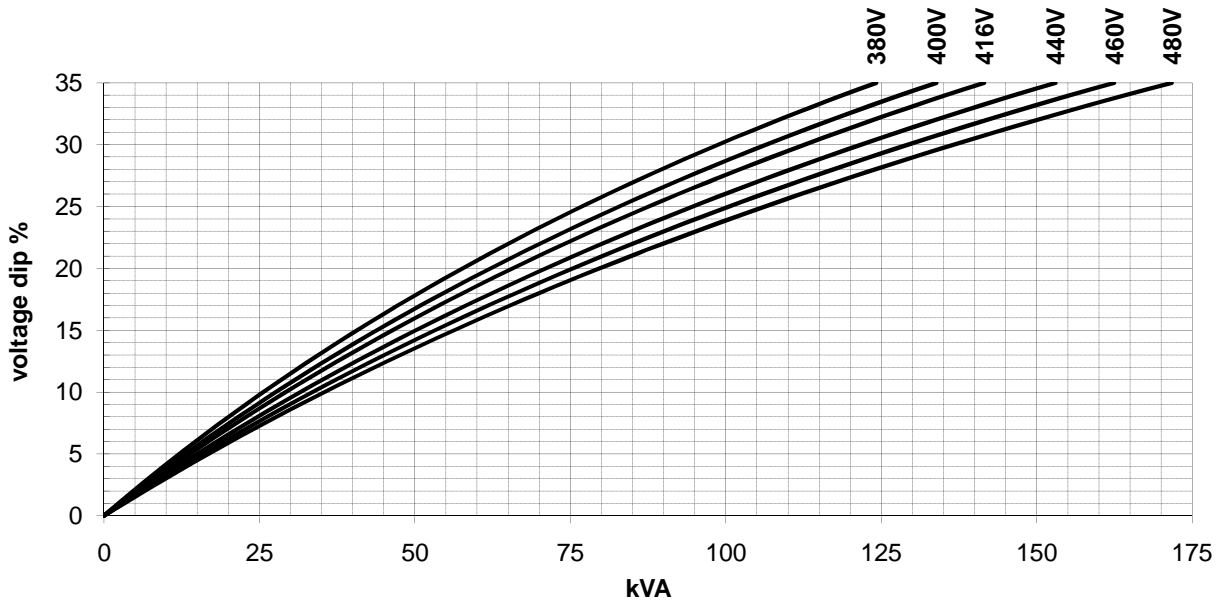

According to: IEC 60034, UTE NFC51.111, VDE 0530, BS 4999/5000, NEMA MG 1-33  
Values quoted are typical. In line with our policy of continuous improvement, we reserve the right to change specification without notice.

**FRAME 1504L****WINDING 6****MODELS LL1514L/LL1524L/LL1534L**

REF: F1504LW6-1 NOVEMBER 2012

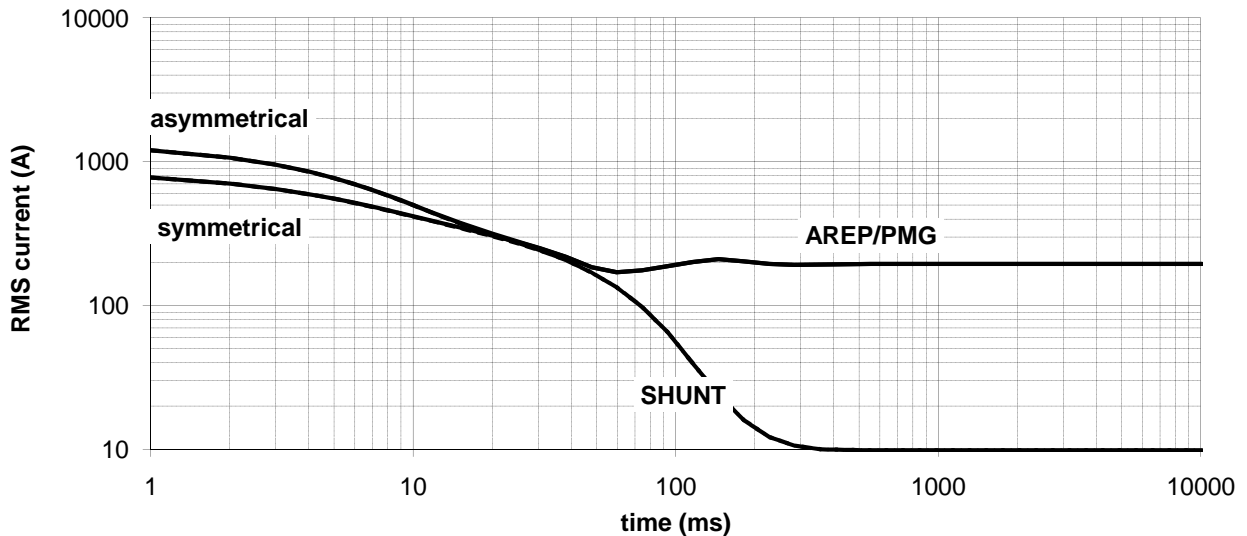**THREE-PHASE SHORT-CIRCUIT DECREMENT CURVES***No-load excitation at rated speed***400V 50Hz, 480V 60Hz***Series star***Multiplication Factors****50Hz Voltages**

<b>380</b>	<b>400</b>	<b>415</b>	<b>440</b>	
<b>Multiplication Factor</b>	0.95	1.00	1.04	1.10

*Apply factor up to 2xT'd, remainder of curve unchanged***60Hz Voltages**

<b>380</b>	<b>400</b>	<b>416</b>	<b>440</b>	<b>460</b>	<b>480</b>	
<b>Multiplication Factor</b>	0.79	0.83	0.87	0.92	0.96	1.00

*Apply factor up to 2xT'd, remainder of curve unchanged***Winding Connection**

<b>Series Star</b>	<b>Parallel Star</b>	<b>Series Delta</b>	
<b>Multiplication Factor</b>	1.00	2.00	1.73

*Apply factor to the complete curve*

According to: IEC 60034, UTE NFC51.111, VDE 0530, BS 4999/5000, NEMA MG 1-33

Values quoted are typical. In line with our policy of continuous improvement, we reserve the right to change specification without notice.